


SPECIFICATIONS FOR STANDARD CONSTRUCTION

- A. Fabricate casework to dimensions, profiles, and details shown.
- B. Cabinet Body Construction
 - 1. Tops and bottoms shall be joined to cabinet ends and internal cabinet components such as fixed horizontals, rails and verticals shall be joined using 8mm diameter industrial grade hardwood dowels, laterally fluted with chamfered ends, securely glued and clamped under pressure during assembly to secure joints and to assure cabinet construction is square. Use minimum of six (6) dowels at each joint for 24" deep cabinets and minimum of four (4) dowels at each joint for 12" deep cabinets.
 - 2. Unless specifically indicated, core shall be ¾" thick particleboard. Edging and surface finishes as indicated herein.
 - 3. Unit backs shall be ¼" thick prefinished MDF, color to be White to match cabinet interior.
 - 4. All adjustable shelves shall be prepared to receive adjustable shelf hardware at 32mm (approximately 1-1/4") centers. There will be an adjustment of 2 ½" up or down from shelf center.
 - 5. All exposed and semi exposed edges of basic cabinet components shall be factory edged with PVC banding, machine applied with waterproof hot melt adhesive.
 - a. edging shall be .018" PVC.
 - 6. Adjustable Shelf Core
 - a. Core's shall be 3/4" thick particleboard up to 36" in length; 1" thick cores for shelves greater than 36" in length
 - b. Front edge shall have factory applied .018" White PVC.
 - 7. Interior Finish
 - a. sides, top, bottom, horizontal, and vertical members, and adjustable shelving faced with white melamine with matching prefinished back.
 - 8. Exposed Ends
 - a. shall be faced with high-pressure decorative laminate GP28 (.028) color to match face.
 - 9. Wall Unit Bottoms
 - a. shall be laminate to match face.
 - 10. Wall and Tall Units Tops
 - a. Top surface will be white melamine matching interior finish.
- C. Drawers
 - 1. Sides, back and sub front shall be 1/2" thick particleboard core wrapped in white vinyl. The back and sub front are doweled and glued into the sides. Dowels shall be fluted, with chamfered ends and a minimum diameter of 8mm.
 - 2. Drawer bottom shall be MDF, 1/4" thick, white melamine to fully captured in groove.
- D. Door/Drawer Fronts
 - 1. Core for all doors and applied drawer fronts shall be 3/4" thick particleboard.
 - 2. Double doors shall be used on all cabinets in excess of 24" wide.
 - 3. Exterior faces shall be laminated with high-pressure decorative laminate GP28, color as selected. Interior face shall be high-pressure white cabinet liner.
 - 4. All edges shall be finished with .018" PVC to match face.
- E. Laminate Selections: Standard laminate manufacturers include the following:
 - 1. Wilsonart
 - 2. Formica
 - 3. Pionite
 - 4. Nevamar
- F. Plastic Laminate Countertops
 - 1. Exposed finished surfaces shall be high pressure decorative laminate grade: HGS.048
 - 2. Edge treatment shall be plastic laminate HGS
 - 3. Countertop core material shall be ¾" particleboard with ¾" buildup at all edges for an overall counter thickness of 1 ½"
 - 4. Backsplash shall be a detached 4" high splash with a particleboard core

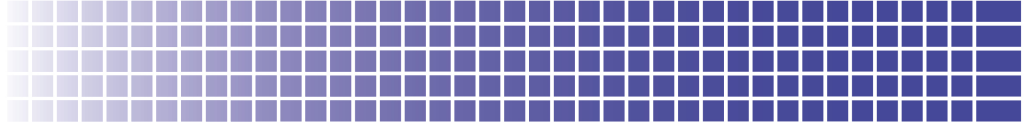


CABINET HARDWARE

- A. Hinges
 - 1. Blum # MODUL; Concealed, 3-way adjustable self-closing 120° nickel plated hinge, doors 48" and over in height shall have three hinges per door.
- B. Drawer Slides
 - 1. Blum # 230M Series; Standard used drawer slides will have a 100-pound load rating at full extension and a built-in, positive stop in both directions, with self-closing feature. Slides shall have a lifetime warranty as offered by the slide manufacturer.
- C. Pulls
 - 1. 4" brushed chrome wire pulls
- D. Shelf Support Pins
 - 1. 5mm bright nickel spoon type

Custom: Eurocase builds per architectural drawings and specifications.

- **Schools**
- **Churches**
- **Hospitals**
- **Restaurants**
- **Reception Counters**

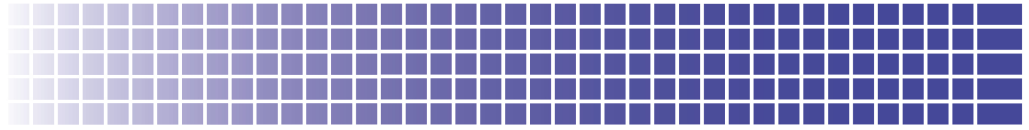

DESIGN OPTIONS

- Locks
 - CompX Timberline - Cylinder body cam locks.
 - Horizontal mount for drawers ; Vertical mount for doors
 - Lock plugs : nickel finish
- 5-Knuckle Hinges
 - Rockford Process - 270° Semi-concealed hinge ; satin chrome finish
- Full Extension
 - Fulterer - Side mount; ball bearing ; full extension ; 100lbs.
- 1 & 3mm Edgeband
 - Charter Industries - PVC tape. Color to be PVC Manufacturer's compatible color to laminate selected.
- Drawer Boxes
 - 7 ply prefinished hardwood maple (doweled construction)
- KV Standards & Brackets
 - Knappe & Vogt - 12- gauge steel ; 2" adjustable slots ; anochrome finish
- Light Valance –
 - wall bottom material will be changed to white melamine
 - 1 ½" – 3" valance to attached to bottom of cabinet
- Solid Surface – Quartz – Granite - Marble

LEED Materials –

- FSC Projects – Eurocase is FSC Certified and can pass on the Chain of Custody
- VESTA particleboard – specialty particleboard panel produced using no added urea-formaldehyde resin process and 100% recycled and/or recovered (pre-consumer) wood material.
 - Qualifying LEED Credits: MR 4.1, MR 4.2, MR 5.1, MR 5.2, MR 7 & EQ 4.4
- Wilsonart H₂O Contact Adhesive – water based contact adhesive with GREENGUARD certification and extremely low VOC & VHAP content
 - Qualifying LEED Credits: EQ 4.1 & EQ 4.4
- PureBond Plywood – Plywood panels are comprised of no added urea formaldehyde components and assembled with no added urea formaldehyde adhesives.
 - Qualifying LEED Credits: MR 4.1, MR 5.1, MR 7 & EQ 4.4